

DUNE™ Second Look®

Scored Tegular
fine texture

USDA
CERTIFIED
BIOBASED
PRODUCT
PRODUCT 99%

Declare.

SUSTAIN®
High Performance
Sustainable Ceiling Systems

GREENGUARD
Gold Certified
(details below)


LEED® WELL™ LBC
UP TO 41% RECYCLED CONTENT

- energy management
- construction waste mgmt
- regional materials
- design for flexibility
- EPD
- recyclable/producer resp.
- biobased materials
- recycled content
- sourcing of raw materials
- material ingredient reporting
- low emitting materials
- lighting quality
- acoustics

Calculate sustainability with GreenGenie™
armstrongceilings.com/greengenie

LOCATION DEPENDENT

\$\$\$\$

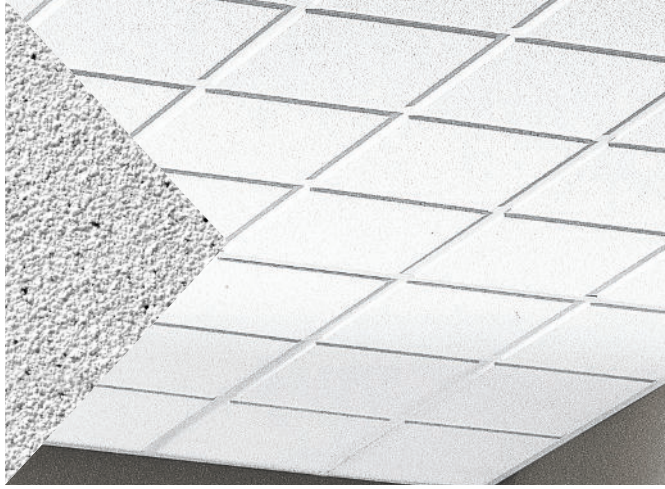

▲ Dune™ Second Look® I panels with Prelude® XL 15/16" suspension system

Fine textured panels with geometric scored visuals.

KEY SELECTION ATTRIBUTES

- Upgrade look at a modest price
- Dune™ Second Look® panels are part of the Sustain® portfolio, and meet the most stringent industry sustainability compliance standards today
- Mold- and mildew-resistant surface
- USDA-Certified Biobased Content – 99%
- Durable – Scratch-resistant
- 30-Year Limited System Warranty against visible sag, mold, and mildew
- 10-Year replacement panel available for item 2711, 2712, 2722



FACE VIEW



Second Look I panel – Scoring creates nominal 12" x 12" squares



Second Look II panel – Scoring creates nominal 24" x 24" squares

COLOR



White (WH)

VISUAL SELECTION

armstrongceilings.com/catdwgs	Susp. Dwg.	Item No.	Dimensions (Inches)
DUNE™ Second Look® I 15/16" Angled Tegular	11	2711	24 x 48 x 3/4"
DUNE™ Second Look® II 15/16" Angled Tegular	11	2712	24 x 48 x 3/4"
9/16" Angled Tegular	27	2722	24 x 48 x 3/4"

PERFORMANCE SELECTION

Dots represent high level of performance.

UL Classified Acoustics	Total Acoustics ¹	Fire Performance	Light Reflect	Bi-Block Anti-Mold/Mildew	Humi-Guard+ Sag Resistant	Certified Low VOC Emissions	DURABILITY	Recycled Content	Recycle Program	Warranty
NRC + CAC =							Scratch			
0.50 35	N/A	Class A	0.81	•	•	•	•	Std	•	•
0.50 35	N/A	Class A	0.81	•	•	•	•	Std	•	•
0.50 35	N/A	Class A	0.81	•	•	•	•	Std	•	•

¹ Total Acoustics® ceiling panels have an ideal combination of sound absorption and sound blocking in one product.

SUSPENSION SYSTEMS

NOTE: It is not recommended to install Silhouette® or Interlude® grid with Second Look® panels.



PHYSICAL DATA

Material
Wet-formed mineral fiber

Surface Finish
Factory-applied latex paint

Fire Performance
Class A: ASTM E84 and CAN/ULC S102 surface burning characteristics. Flame Spread Index of 25 or less. Smoke Developed Index of 50 or less (UL labeled).

ASTM E1264 Classification
Type III, Form 2, Pattern C E K
Fire Class A

Humidity/Sag Resistance
HumiGuard® Plus ceiling panels are recommended for areas subject to high humidity, up to, but not including, standing water and outdoor applications.

Anti-Mold/Mildew
Ceiling tiles with BioBlock® performance resist the growth of mold and mildew on the tile surface.

VOC Emissions
GREENGUARD Gold Certified
Third-party certified compliant with California Department of Public Health CDPH/EHLB/Standard Method Version 1.2, 2017. This standard is the guideline for low emissions in LEED®, WELL Building Standard™, Living Building Challenge® (LBC), CalGreen Title 24, ANSI/ASHRAE/USGBC/IES Standard 189; ANSI/GBI Green Building Assessment Protocol.

PRODUCT CERTIFIED FOR LOW CHEMICAL EMISSIONS
UL.COM/GG
UL 2818



Insulation Value
R Factor – 1.6 (BTU units); R Factor – 0.28 (Watts units)

Design Consideration

Do not mix Dune™ Second Look® with standard Dune panels in the same room. It is not recommended to install Silhouette® or Interlude® grid with Second Look® panels.

30-Year Performance Guarantee & Warranty
When installed with Armstrong® Suspension System. Details at armstrongceilings.com/warranty

Weight; Square Feet/Carton
1.00 lbs/SF; 80 SF/ctn

Minimum Order Quantity
1 carton

Metric Items Available
2711M, 2722M, 2712M – Metric items are subject to extended lead times and minimum quantities. Contact your representative for more details.

TechLine / 1 877 276-7876
armstrongceilings.com/dune
BPCS-3223-922

LEED® is a registered trademark of the U.S. Green Building Council; Declare® and Living Building Challenge® (LBC) are registered trademarks of the International Living Future Institute®; WELL™ and WELL Building Standard are trademarks of the International WELL Building Institute; UL and UL Certified are trademarks of UL LLC; all other trademarks used herein are the property of AWI Licensing LLC and/or its affiliates © 2022 AWI Licensing LLC

Armstrong®
CEILING & WALL SOLUTIONS

MINERAL FIBER – Standard

